


Product Specifications

Product Dimensions

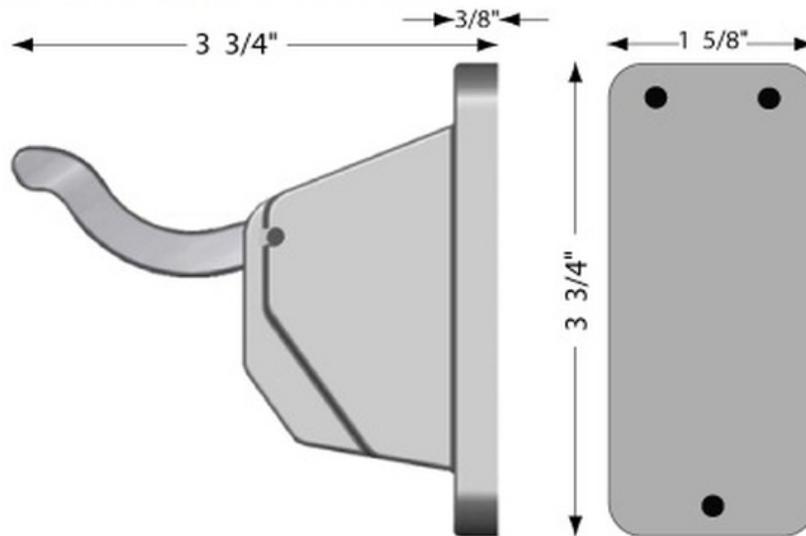

Base and Arm Material Composition

High strength polycarbonate. Note: Polycarbonate should not be subjected to industrial solvents, such as acetone.

Magnets:

N40 Grade Neodymium-Iron-Boron (NdFeB)

Magnet Coating:

N40 Grade Neodymium-Iron-Boron (NdFeB)

Magnet Life:

Permanent magnetic field subject to the following conditions:

1. Magnets are not subjected to excessive or prolonged heat above 45°C;
2. Magnets are not subjected to high magnetic fields;
3. Magnets are not subjected to outside impact or abrasion that will damage the coating and permit oxidation of the NdFeB.

Adhesive:

Structural grade elastic adhesive – Methylmethacrylate(MMA)

PIN:

Stainless steel pin – standard

Aluminum rivet with stainless steel washer – tamper resistant

Mounting:

3 mounting screws provided – #6 combination Robertson and Philips head screws. Mounting holes are counter-bored to accept #6 combination Robertson and Philips head screws with screw heads flush with surface of base. Screws colour matched to hook colour.